


BARD OEM REPLACEMENT BY GENTEQ

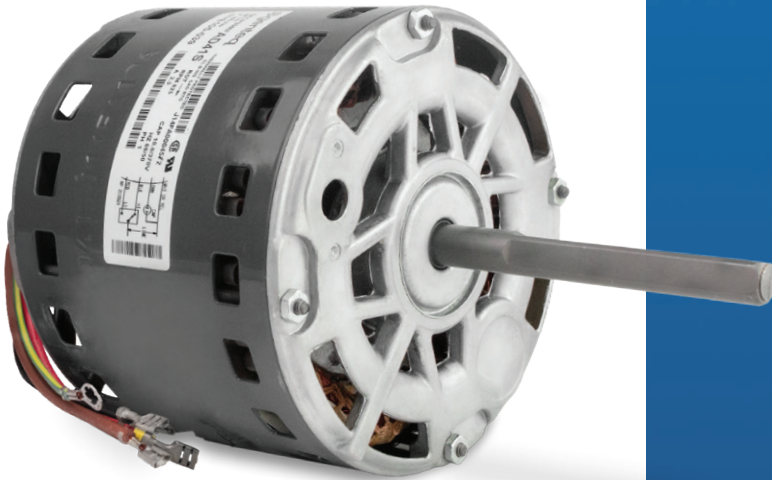


8105-039

- 1/3 HP
- 208-230 VOLTS
- 2.3 AMPS
- 825 RPM
- CCWSE
- 1 PHASE
- BAND MOUNT
- 2 SPEED
- THERMALLY PROT.
- SLEEVE BEARING
- OPEN AIR OVER ENCLOSURE
- REQUIRES 10 MFD CAPACITOR
- SHAFT: 1/2" x 4"
- 52" LEADS


CROSS REFERENCE: 5KCP39MFAD41S, S8105-039

8107-010

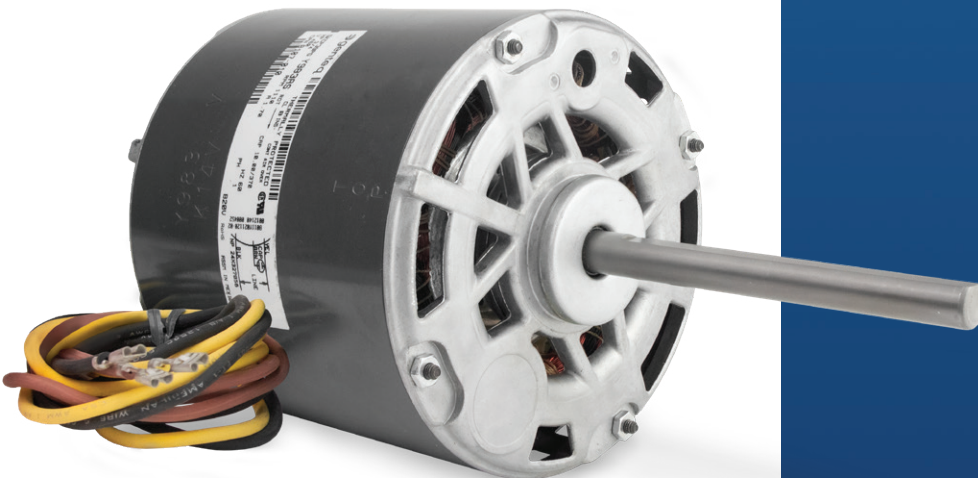

- 3/4 HP
- 460 VOLTS
- 1.7 AMPS
- 1110 RPM
- CCWSE
- 1 PHASE
- BAND MOUNT
- 1 SPEED
- THERMALLY PROT.
- SLEEVE BEARING
- OPEN AIR OVER ENCLOSURE
- REQUIRES 10 MFD CAPACITOR
- SHAFT: 1/2" x 4.75"
- 46" LEADS


CROSS REFERENCE: 5KCP39GY983AS, S81-660

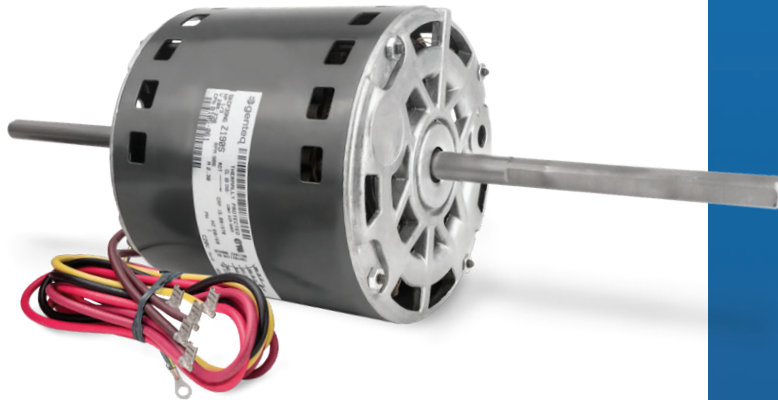

8105-061

- 1/3 HP
- 460 VOLTS
- 1.2 AMPS
- 985 RPM
- CWLE (DUAL SHAFT)
- 1 PHASE
- BAND MOUNT
- 2 SPEED
- THERMALLY PROT.
- SLEEVE BEARING
- OPEN AIR OVER ENCL.
- REQUIRES 15 MFD CAPACITOR
- SHAFT (DUAL):
5 3/8" x 1/2" x 5 3/8"
- 48" LEADS


CROSS REFERENCE: 5KCP39PGZ269AS

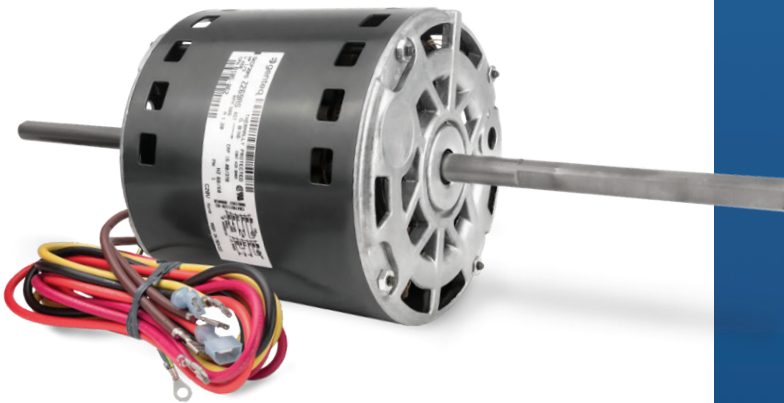

8105-062

- 1/3 HP
- 208-230 VOLTS
- 2.3 AMPS
- 985 RPM
- CWLE (DUAL SHAFT)
- 1 PHASE
- BAND MOUNT
- 2 SPEED
- THERMALLY PROT.
- SLEEVE BEARING
- OPEN AIR OVER ENCL.
- REQUIRES 15 MFD CAPACITOR
- SHAFT (DUAL):
5 3/8" x 1/2" x 5 3/8"
- 28" LEADS

CROSS REFERENCE: 5KCP39NGZ190S

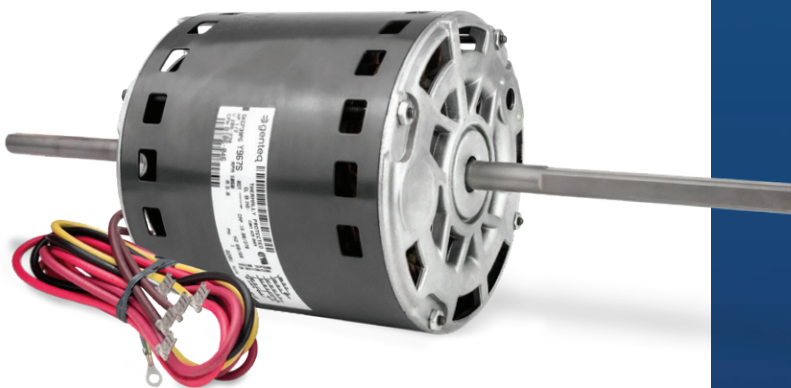

8106-046

- 1/2 HP
- 208-230 VOLTS
- 3 AMPS
- 1050 RPM
- CWLE (DUAL SHAFT)
- 1 PHASE
- BAND MOUNT
- 2 SPEED
- THERMALLY PROT.
- SLEEVE BEARING
- OPEN AIR OVER ENCL.
- REQUIRES 15 MFD CAPACITOR
- SHAFT (DUAL):
5 3/8" x 1/2" x 5 3/8"
- 28" LEADS

CROSS REFERENCE: 5KCP39PGY967S