

CENTRIFUGAL BLOWERS

1 YEAR
WARRANTY

PTDP3

- 1/70 HP
- .45 AMPS
- 75 CFM
- Ball Bearing
- cULus Approved
- Max Inlet Temp. 104F
- Round Outlet Flange: 4 Inch Outside Diameter
- Automatic Overload Protection
- Includes Conduit Box
- 5 LBS
- 115 VOLTS
- 3020 RPM
- PSC Motor Type
- Insulation Class B
- Mounting - All Position

Cross Ref.: 4C443, 7021-4931, 50-018, 1TDP3,

PTDN7

- 1/125 HP
- 0.23 AMPS
- 50 CFM
- Ball Bearing
- cULus Approved
- Max Inlet Temp. 104F
- Round Outlet Flange: 4 Inch Outside Diameter
- Automatic Overload Protection
- Includes Conduit Box
- 4 LBS
- 115 VOLTS
- 3080 RPM
- PSC Motor Type
- Insulation Class B
- Mounting - All Position

Cross Ref.: 4C440, 1C180, 1TDN7A, 7021-3466, 1TDN7






PTDR9

- 1/15 HP
- 1.28 AMPS
- 463 CFM
- Ball Bearing
- cULus Approved
- Max Inlet Temp. 104F
- Outlet Flange Bolt Hole Dimension: 8-7/8" x 4-3/8"
- Automatic Overload Protection
- 12 LBS
- 115 VOLTS
- 1560 RPM
- PSC Motor Type
- Insulation Class B
- Mounting - All Position

Cross Ref.: 4C448, 4C264, 1TDR9, 1TDR9A

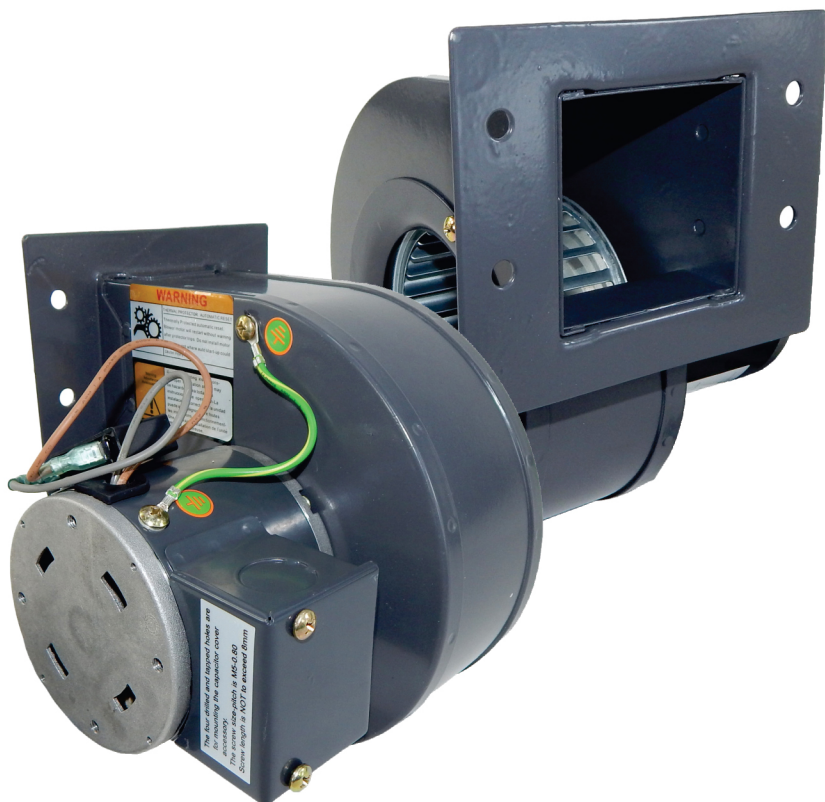

PTDP6

- 1/30 HP
- 0.33 AMPS
- 133 CFM
- Ball Bearing
- cULus Approved
- Max Inlet Temp. 104F
- Outlet Flange Bolt Hole Dimension: 4.09" x 1.50"
- Automatic Overload Protection
- Includes Conduit Box
- 6 LBS
- 230 VOLTS
- 2880 RPM
- PSC Motor Type
- Insulation Class B
- Mounting - All Position

Cross Ref.: 50752-D230, 7021-3483, 2C915, 1TDP6, 1TDP6A



PTDT6

- 1/15 HP
- 1.10/0.85 AMPS
- 428/293 CFM
- Ball Bearing
- cULus Approved
- Max Inlet Temp. 104F
- Outlet Flange Bolt Hole Dimension: 8-7/8" x 4-3/8"
- Automatic Overload Protection
- 2 Speed
- 11 LBS
- 115 VOLTS
- 1500/1085 RPM
- PSC Motor Type
- Insulation Class B
- Mounting - All Position

Cross Ref.: 4C565, 7063-5243, 1TDT6



PTDP5

- 1/30 HP
- 0.65 AMPS
- 131 CFM
- Ball Bearing
- cULus Approved
- Max Inlet Temp. 104F
- Outlet Flange Bolt Hole Dimension: 1.5" X 4.09
- Automatic Overload Protection
- Includes Conduit Box
- 5 LBS
- 115 VOLTS
- 2880 RPM
- PSC Motor Type
- Insulation Class B
- Mounting - All Position

Cross Ref.: 4C442, 50752-D500, 7021-3467, 2C610, 1TDP5A, 1TDP5



PTDR4

- 1/20 HP
- .43 AMPS
- 271 CFM
- Ball Bearing
- cULus Approved
- Max Inlet Temp. 104F
- Outlet Flange Bolt Hole Dimension: 4-7/8" x 4-3/8"
- Automatic Overload Protection
- Includes Conduit Box
- 9 LBS
- 230 VOLTS
- 1670 RPM
- PSC Motor Type
- Insulation Class B
- Mounting - All Position

Cross Ref.: 4C869, B45227-2, 7063-7019
1TDR4, 1TDR4A



PTDT3

- 1/10 HP
- .98 AMPS
- 559 CFM
- Ball Bearing
- cULus Approved
- Max Inlet Temp. 104F
- Outlet Flange Bolt Hole Dimension: 6" x 5"
- Automatic Overload Protection
- Includes Conduit Box
- 13 LBS
- 230 VOLTS
- 1450 RPM
- PSC Motor Type
- Insulation Class B
- Mounting - All Position

Cross Ref.: 4C870, 1TDT3



PTDU7

- 1/70 HP
- .39 AMPS
- 127 CFM
- Ball Bearing
- cULus Approved
- Max Inlet Temp. 104F
- Outlet Size: 1" x 4"
- Over Height: 3.83
- Automatic Overload Protection
- 8 LBS
- 115 VOLTS
- 3200 RPM
- PSC Motor Type
- Insulation Class B
- Mounting - All Position

Cross Ref.: 4C825, 1TDU7, 1TDU7A, A125, 7021-6109,
7021-10183, 7021-6809, 7021-6791, 7021-10749,
7021-7809, NBK 20532