


FLEX-IN-1

A STOCKING MUST HAVE!

A GENERAL PURPOSE MOTOR THAT IS RE-IMAGINING WHAT A C-FACE CAN DO.

1 YEAR
WARRANTY

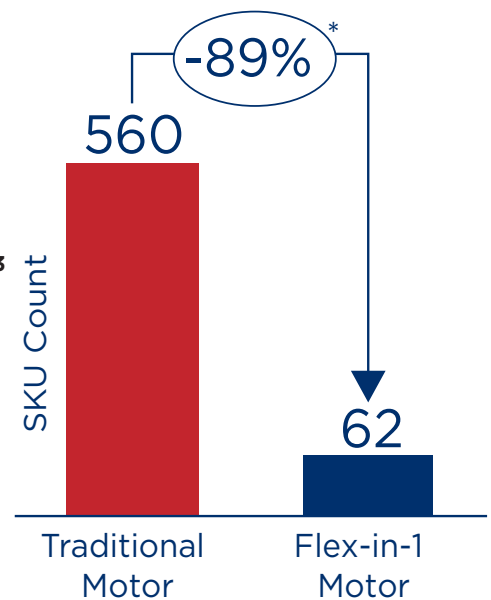

*When compared to stocking traditional general purpose motor inventory. Actual inventory SKU's and carrying cost savings may vary based on individual needs.


All you need is a
T-25 screwdriver

Simply remove 4 bolts & 2 plugs to reconfigure the **FLEX-IN-1**.


Each motor arrives in an F-1 position and can be quickly changed to F-2 or F-3 positions to fit multiple applications. Save time by eliminating the need for custom builds.

IN STOCK READY TO SHIP!
MODELS AND SPECS ON BACK


One Motor With Multiple Mounting Options “Out-Of-The-Box”

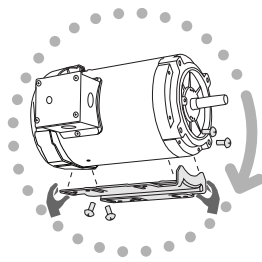


Repositionable Base



F-1



F-3



F-2

3 PHASE - C - FACE WITH BASE TOTALLY ENCLOSED FAN COOLED

Catalog Number	HP	RPM	Voltage	Frame	Enclosure	F.L. Amps 60/50 HZ		APP. WGT. (lbs)	Length (inches)
FX13BK002	0.33	3600	230/460	56C	TE	1.8/1.9	1.85/1.92	21	10.80
FX13BK004	0.33	1800	230/460	56C	TE	1.6/1.8	1.6/1.8	20	10.55
FX13BK006	0.33	1200	230/460	56C	TE	2.2/1.1	2.4/1.2	20	10.55
FX12BK002	0.5	3600	230/460	56C	TE	2.2/1.1	2.2/1.1	21	10.80
FX12BK004	0.5	1800	230/460	56C	TE	2.4/1.2	2.2/1.1	24	11.05
FX12BK006	0.5	1200	230/460	56C	TE	2.1/1.05	2.2/1.1	25	11.05
FX34BK002	0.75	3600	230/460	56C	TE	3.2/1.6	3/1.5	23	10.80
FX34BK004	0.75	1800	230/460	56C	TE	3/1.5	3/1.5	24	11.05
FX34BK006	0.75	1200	230/460	56HC	TE	3.25/1.6	3.5/1.75	32	12.05
FX01BK002	1	3600	230/460	56C	TE	3/1.5	3.2/1.6	26	11.30
FX01BK004	1	1800	230/460	56HC	TE	3.13/1.55	3.6/1.8	42	13.05
FX01BK006	1	1200	230/460	56HC	TE	3.8/1.9	4.2/2.1	48	13.80
FX32BK002	1.5	3600	230/460	56HC	TE	4/2	4.6/2.3	37	12.30
FX32BK004	1.5	1800	230/460	56HC	TE	4.6/2.3	5.4/2.7	45	13.30
FX02BK002	2	3600	230/460	56HC	TE	5/2.5	6/3	46	13.55
FX02BK004	2	1800	230/460	56HC	TE	6/3	6.8/3.4	48	13.80
FX03BK002	3	3600	230/460	56HC	TE	7.6/3.8	9/4.5	45	13.30

3 PHASE - C - FACE WITH BASE OPEN DRIP PROOF

Catalog Number	HP	RPM	Voltage	Frame	Enclosure	F.L. Amps 60/50 HZ		APP. WGT. (lbs)	Length (inches)
FX13BK001	0.33	3600	230/460	56C	DP	1.5/1.75	1.6/1.8	20	10.78
FX13BK003	0.33	1800	230/460	56HC	DP	1.2/1.61	1.3/1.66	25	11.03
FX13BK005	0.33	1200	230/460	56HC	DP	1.4/1.7	1.6/1.8	29	11.78
FX12BK001	0.5	3600	230/460	56C	DP	2.0/1.0	2/1	20	10.78
FX12BK003	0.5	1800	230/460	56HC	DP	1.8/1.9	1.6/1.8	27	11.53
FX12BK005	0.5	1200	230/460	56HC	DP	2.2/1.1	3/1.5	30	12.03
FX34BK001	0.75	3600	230/460	56HC	DP	2.6/1.3	2.6/1.3	23	11.03
FX34BK003	0.75	1800	230/460	56HC	DP	2.6/1.3	2.2/1.1	30	12.03
FX34BK005	0.75	1200	230/460	56HC	DP	2.8/1.4	2.4/1.2	44	14.03
FX01BK001	1	3600	230/460	56HC	DP	2.8/1.4	3.2/1.6	23	11.03
FX01BK003	1	1800	230/460	56HC	DP	3.2/1.6	2.6/1.3	36	12.53
FX01BK005	1	1200	230/460	56HC	DP	3.4/1.7	4/2	48	14.28
FX32BK001	1.5	3600	230/460	56HC	DP	4/2	4/2	40	12.03
FX32BK003	1.5	1800	230/460	56HC	DP	4.4/2.2	5/2.5	44	14.03
FX02BK001	2	3600	230/460	56HC	DP	5.4/2.7	6.2/3.1	43	12.28
FX02BK003	2	1800	230/460	56HC	DP	6/3	6.6/3.3	46	14.03
FX03BK001	3	3600	230/460	56HC	DP	7.6/3.8	8.8/4.4	43	13.28
*FX03BK003	3	1800	230/460	56HC	DP	--	--	49	--

575 VOLT AVAILABLE - FACTORY SHIPPED

***FX03BK003 Production Pending**

Please check with your sales person for pricing and availability.