





# RESCUE<sup>®</sup> Liberty<sup>™</sup>

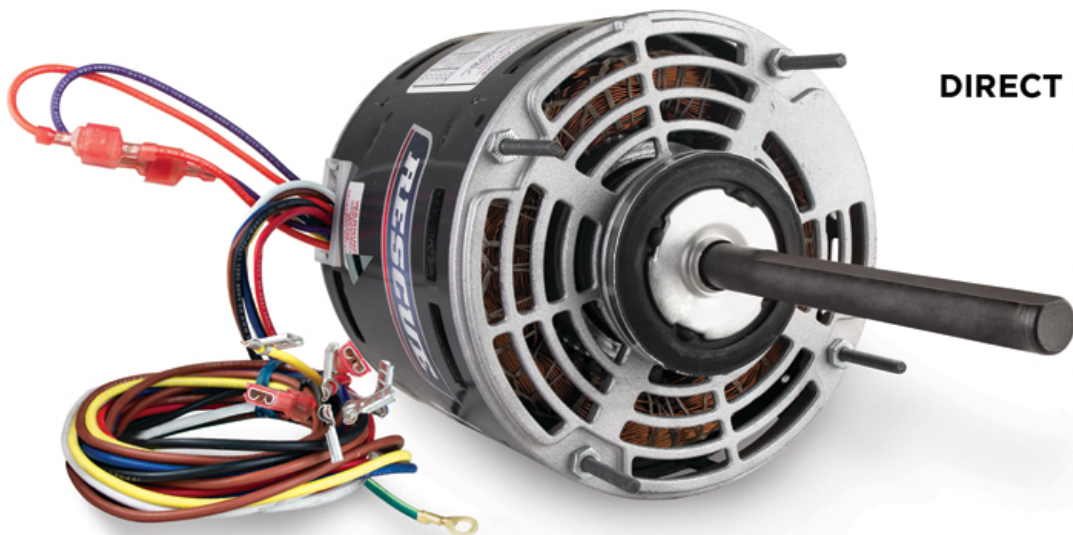

## DIRECT DRIVE BLOWER MOTORS

- Multi-Horsepower Rated
- All Angle Mounting
- Reversible Rotation
- 60 Hz Single Phase
- Flex Mount with Kit 44 (*not incl.*)
- RHEEM<sup>®</sup> and RUUD<sup>®</sup> Motor Side Shell Holes
- Belly Band Mount with Kit 17 (*not incl.*)
- OAO, 40°C Ambient
- Extended Studs
- Resilient Mount utilizing 2.5" Hub Rings

HP	RPM	SPD	VOLTAGE	CAPACITOR	AMPS	BEARING	SHAFT SIZE	BODY LENGTH	MODEL
1/2 - 1/6	1075	4	115	12.5-7.5	7.3	SLEEVE	1/2" - 5 1/2"	5 1/4"	US5460
1/2 - 1/6	1075	4	208-230	10-5	3.6	SLEEVE	1/2" - 5"	5 1/4"	US5461

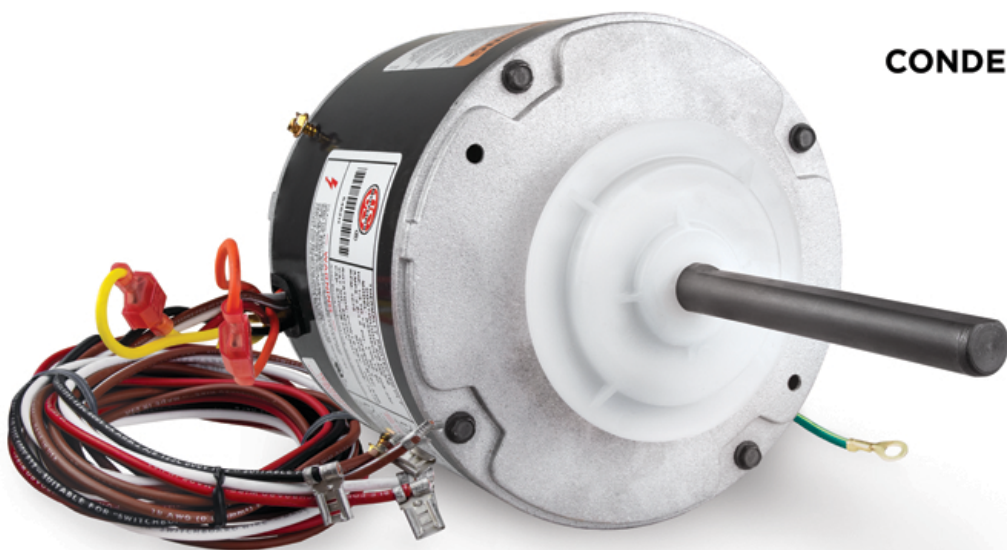

## CONDENSER FAN MOTORS

- Multi-Horsepower Rated
- Totally Enclosed Air Over
- All Angle Mounting
- Reversible Rotation
- 60 Hz Single Phase
- 48" Power Leads
- RHEEM<sup>®</sup> and RUUD<sup>®</sup> Motor Side Shell Holes
- RHEEM<sup>®</sup> and TRANE<sup>®</sup> End Shield Mounting Holes
- Long Life Ball Bearing System
- Ambient Ratings:
  - › 60°C (140°F) Standard Motors
  - › 70°C (158°F) Mojave<sup>®</sup> Motors

HP	RPM	SPD	VOLTAGE	CAPACITOR	AMPS	BEARING	SHAFT SIZE	BODY LENGTH	MODEL
1/3 - 1/6	1075	2	208-230	5	2.6/1.8	BALL	1/2" - 5"	4 1/2"	US5462H
1/3 - 1/6	825	2	208-230	7.5	1.9/1.2	BALL	1/2" - 4 7/8"	5 1/4"	US5464H

